

CT10817 Controller Board Specification

PCAP Microchip® mxT1664T3 USB

**Sustaining Quality,
Exceeding Expectations**

DawarTouch®

1. General Description

The CT10817 is a controller board programmed to work with 8.0in Dawar sensor DW02739. The unprogrammed board is CT10405. The board uses the Microchip® mxT1664T3 maXTouch® controller. The communications interface is standard USB 2.0 full speed.

For more information on the mxT1664T3x controller refer to the following Microchip® documentation:

- ▶ mxT1664T3 Datasheet
- ▶ Interfacing with maXTouch Touchscreen Controllers

Both documents are available on [Microchip's website](#).

2. Functional Description

The CT10817 controller supports the following features:

- ▶ Up to 16 finger touches
- ▶ Stylus touches (stylus diameter depends on sensor design)
- ▶ Glove touches
- ▶ Thick cover lenses (up to 4mm glass, 2mm plastic)
- ▶ Greater than 100Hz report rate
- ▶ Low latency (<10ms for first touch report from idle mode)
- ▶ Automatic self-calibration
- ▶ Aggressive noise avoidance and noise cancellation features
- ▶ Maximum resolution of 4095 x 4095


Additional tuning support from Dawar is available for specialized applications.

3. Electrical Specifications

Parameter	Min	Typ	Max	Units	Remarks
Digital Power Supply (VDD)	-	5	-	V	USB standard
Active Current	-	36	-	mA	Note 1
Sleep Current	-	3.5	-	mA	
X Electrodes	-	-	30	-	
Y Electrodes	-	-	20	-	

Note 1: Active power depends on configuration settings and number of touches.

4. Connector

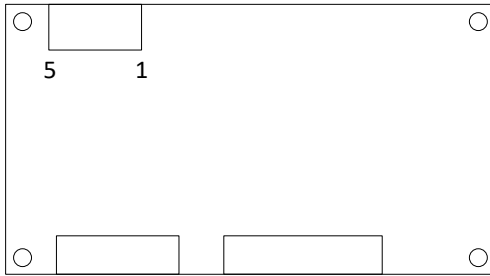

Pin	Description
1	GND
2	5V
3	GND
4	D+
5	D-

USB board connector part number is Most Well 2WF2HD-201505T121A01 (compatible with JST S5B-PH-K-S).

Mating cable connector is Most Well 2HG2CT-201105NPA1A01 with crimp contact 2F2CA-PT1701 (compatible with JST PHR-5 and SPH-002T-P0.5L).

5. Environmental Specifications

Parameter	Min	Typ	Max	Units	Remarks
Operating Temperature	-40	-	85	°C	
Storage Temperature	-40	-	90	°C	
Relative Humidity	0	-	95	%RH	Note 1

Note 1: RH is defined at 60°C, non-condensing.

6. Operating System Support

Operating System	Supported	Remarks
Microsoft Windows XP	Yes	Note 1
Microsoft Windows 7	Yes	Note 2
Microsoft Windows 8	Yes	Note 2
Microsoft Windows 10	Yes	Note 2
Linux	Yes	Note 3

Note 1: Requires custom mouse emulation program. Contact Dawar for support.

Note 2: Compatible with Microsoft HID. No driver required.

Note 3: Kernel version 2.6.38 or later. Refer to <https://github.com/atmel-maxtouch/linux/wiki/USB>.


7. Product Life

Dawar Technologies is committed to providing products stability and support to our valued



customers throughout the life of the product. All Dawar Touch products meet the following minimum requirements:

- ▶ 5 year minimum product lifecycle
- ▶ 12 month end of life (EOL) notification
- ▶ Last time buy option with EOL notification
- ▶ 60 day change notification for any change that affects form, fit, or function

- NOTES:
- CONNECTOR FOR J2: MOST WELL MWFP005PSN-H20-24
 - CONNECTOR FOR J4: MOST WELL MWFP005PSN-H20-34
 - CONNECTOR FOR J3: MOST WELL 2WF2HD-201505T121A01 (COMPATIBLE WITH JST S5B-PH-K-S)
 - MATING CONNECTOR FOR J3: MOST WELL HOUSING 2HGZCT-201105NPA1A01 AND CRIMP CONTACT SPH-0021-P0.5L (COMPATIBLE WITH JST HOUSING PHR-5)
 - DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE ONLY.

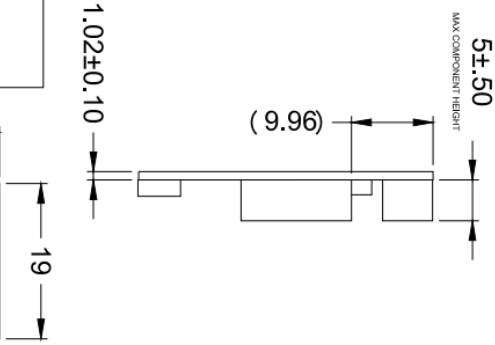

J3	
1	GROUND
2	USB_5V
3	GROUND
4	D+
5	D-

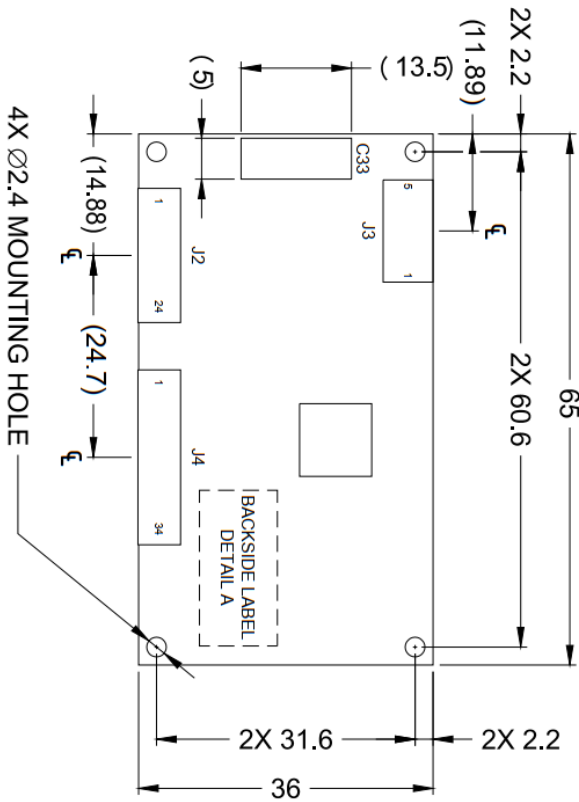

REV	DATE	ECO	DESCRIPTION	DRAWN	DATE
A	1	-	INITIAL RELEASE	CPD	10-11-18
B	1	1497	UPDATED CONTROLLER CONFIGURATION	CPD	05-03-19
B	2	1512	CHANGED THE PART NUMBER FOR J3 CONNECTOR AND MATING CONNECTOR AND ADDED COMPATIBLE JST TYPE C	HT/C	1-8-20

Dawar Touch		TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.	
1000 Valley Forge Road, Suite 1000, Pittsburgh, PA 15230 1-800-366-1904 • Fax: 412-222-2888	BASE CONTROLLER CT10405-B	FIRMWARE NO. FW00509-C-2	TECHNOLOGIES, INC. CT10817-B
DESCRIPTION ATMEL PCB - 166413 USB 24x34 PCAP CONTROLLER	UNIT mm (INCH)	TOLERANCE ±.025 (unless specified)	SHEET 1 OF 1
			DATE 10-11-18

Controlled Cassie Ostrowski
2020.01.21
ENGINEERING / GRAPHICS 10:29:47 -05'00'

Revision History

Revision	Date	Content	Author
A	9-6-2019	Initial Release	Tony Gray
B	1-27-2020	Added JST part numbers for USB connector	Tony Gray