



REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	12-08-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

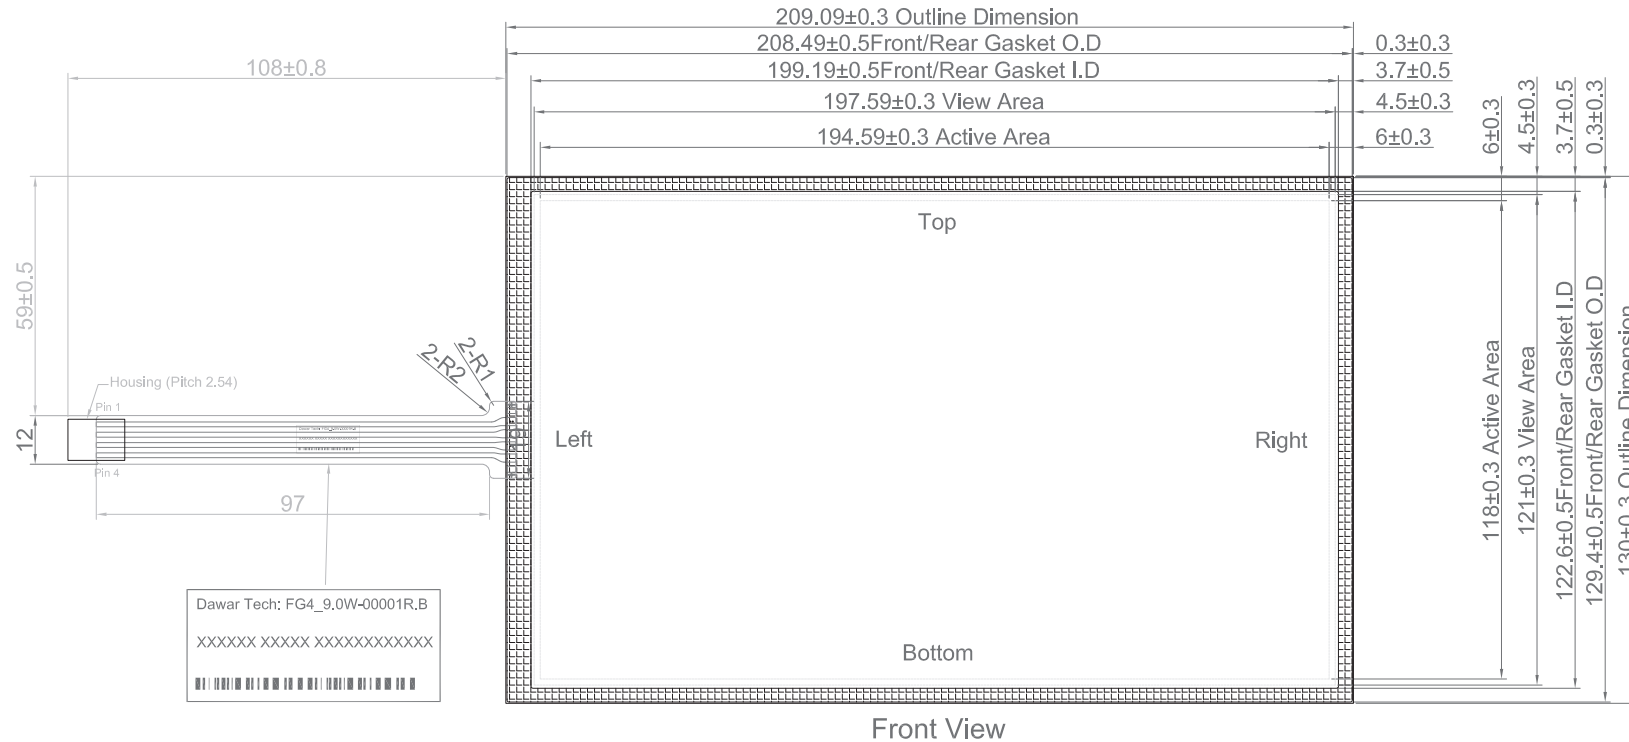

Front View

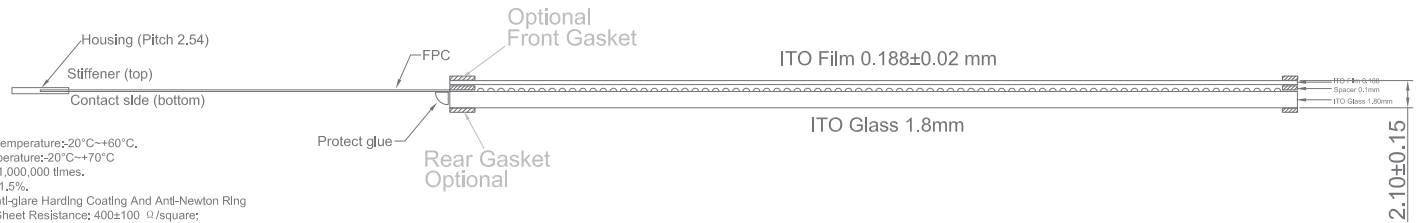

- NOTES:
- 1.Operation Temperature:-20°C~+60°C, Storage Temperature:-20°C~+70°C
  - 2.Life Time:>1,000,000 times.
  - 3.Linearity:≤1.5%.
  - 4.ITO Film:Anti-glare Harding Coating And Anti-Newton Ring  
 Sheet Resistance:400±100 Ω/square;  
 ITO Glass: Sheet Resistance:400±100 Ω/square
  - 5.Tail Type :Gold plated FPC
  - 6.All Tolerance Without Marked:±0.3
  - 7.All Materials and Components must be RoHS compliant
  - 8.No Material Is allowed to be larger than the glass size

Pin#	Assignment
1	Left
2	Top
3	Right
4	Bottom



1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302  
 1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958  
 e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG4_9.0W-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
9.0"W 4-Wire Resistive Touch Screen	1 OF 1		