





REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	12-12-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

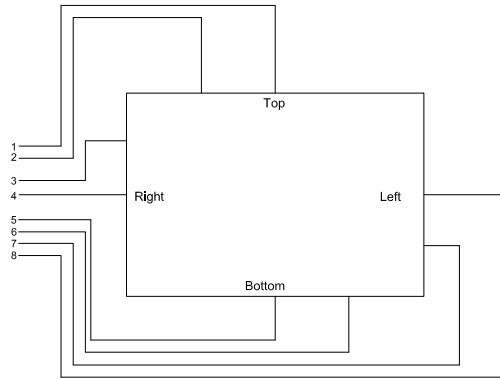

Detail:A

Pin#	Assignment
Pin1	Top excite
Pin2	Top sense
Pin3	Left sense
Pin4	Left excite
Pin5	Bottom excite
Pin6	Bottom sense
Pin7	Right sense
Pin8	Right excite

FRONT VIEW

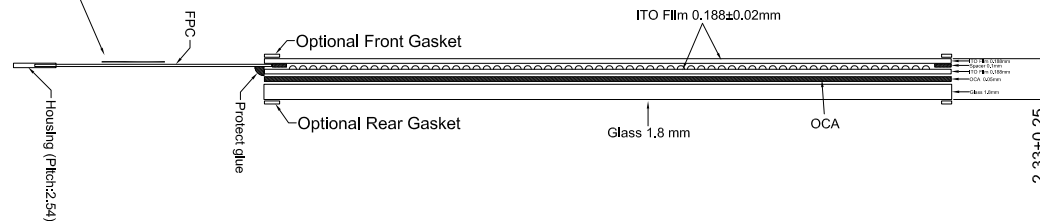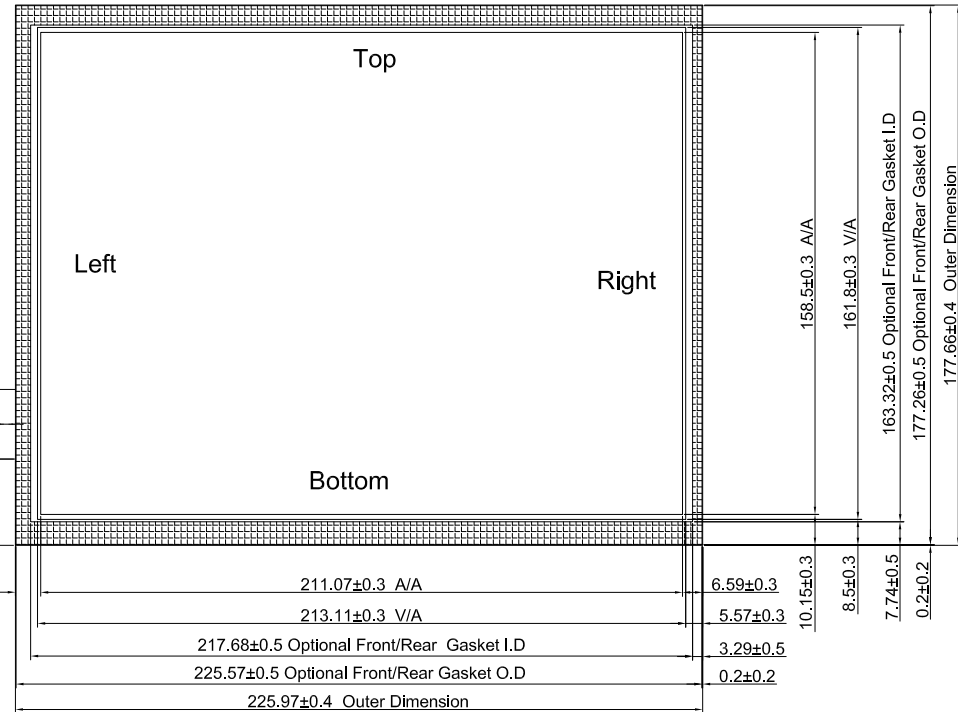

NOTES:

- Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- Life Time: >5,000,000 times.
- Linearity: ≤ 1.5%.
- ITO Film: Anti-glare & Hardening Coating Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
ITO Film: Clear- Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square
- Tall Type :Gold plated FPC
- All Tolerance Without Marked:±0.3
- All Materials and Components must be RoHS compliant
- No Material is allowed to be larger than the glass size



THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	PL8(1)_10.4-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
10.4" 8-Wire Resistive Touch Screen	1 OF 1		