

**NOTES:**

1. CONNECTOR FOR J1: MOST WELL MWFPC05PSN-H20-42
2. CONNECTOR FOR J2: MOST WELL MWFPC05PSN-H20-54
3. CONNECTOR FOR J3: MOST WELL W2000-R2051221
4. MATING CONNECTOR FOR J3: MOST WELL A2001H-05P

REVISIONS				DWN	DATE
ITEM REV	DWG REV	ECO	DESCRIPTION	CPO	12-17-15
A	1	-	INITIAL RELEASE.		

5.00±.50  
MAX COMPONENT HEIGHT

1.02±0.10


19.05

9.53

**DETAIL A**

J3	
PIN	FUNCTION
1	GROUND
2	USB_5V
3	GROUND
4	D+
5	D-

CT10391-A-1  
FW00405-A-1  
MMDDYYhhmmss S/N

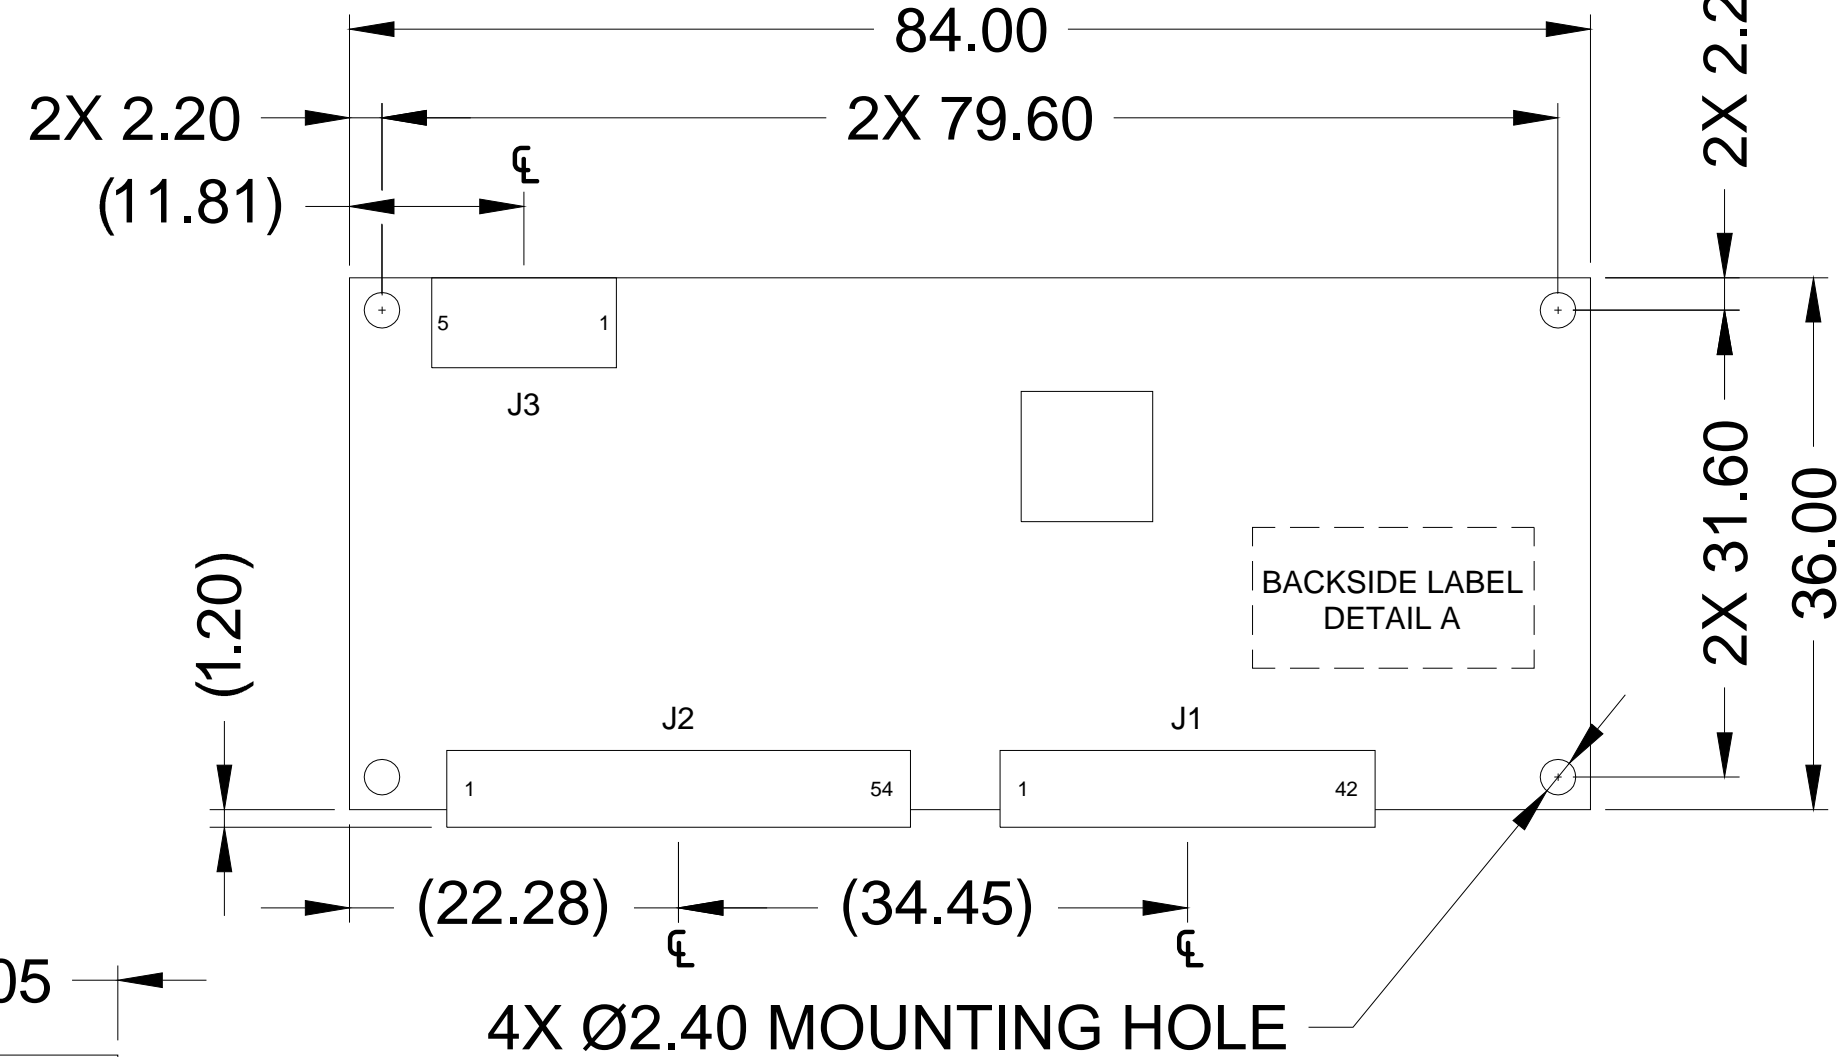

1016 North Lincoln Avenue, Pittsburgh, PA 15233  
1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958  
e-mail: sales@dawar.com - www.dawar.com

THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

FIRMWARE  
FW00405-A-1

DESCRIPTION

ATMEL PCB - 1664T3 USB 42x54 PCAP CONTROLLER (DW01721)

ITEM/DRAWING NO.  
CT10391-A

UNIT  
mm [INCH]

TOLERANCE  
±0.25 [0.010] UNLESS SPECIFIED

SHEET  
1 OF 1

DRAWN BY  
OSTROWSKI

DWG REV  
1

DATE  
12-17-15