


REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	07-31-08	AMH
B	Updated temp spec and labeling	08-17-09	AMH
C	Added optional front/rear gasket.	09-17-09	AMH

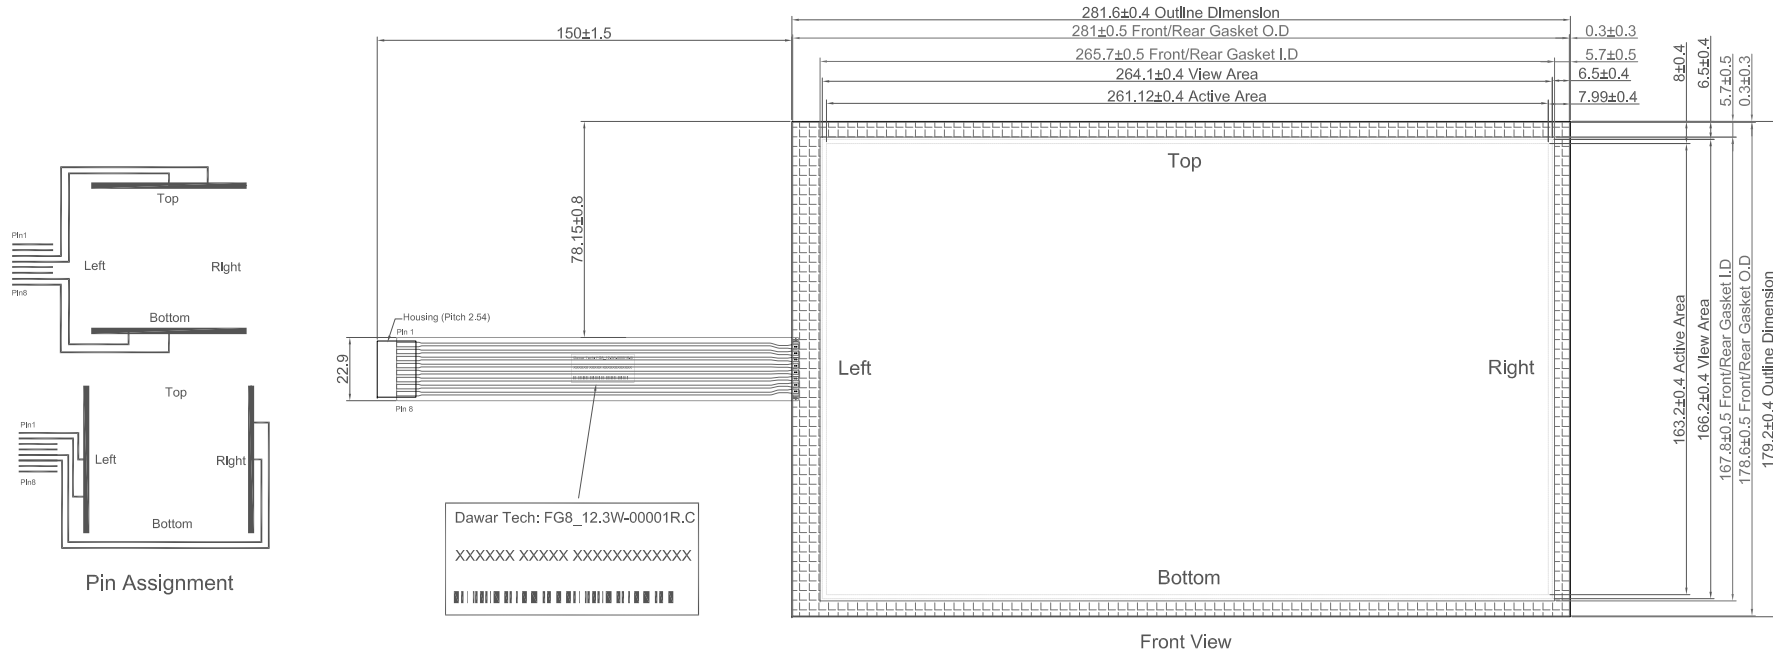

**NOTES:**

1. Operation Temperature: -20°C--60°C, RH90%  
Storage Temperature: -20°C--70°C, RH90%
2. Hitting Life: >8,000,000 times.  
Writing Life: >100,000 times.
3. Linearity: ≤±2.0%
4. ITO Film: Anti-Glare Hard Coating & Anti-Newton Ring  
Sheet Resistance 400±50 Ω/square;  
ITO Glass: Sheet Resistance 400±50 Ω/square;
5. Tail Type :FPC
6. Unspecified Tolerance :±0.3
7. All Materials and Components must be RoHS compliant
8. No Material is allowed to be larger than the glass size

Pin#	Assignment
Pin1	LEFT EXCITE
Pin2	LEFT SENSE
Pin3	TOP SENSE
Pin4	TOP EXCITE
Pin5	RIGHT EXCITE
Pin6	RIGHT SENSE
Pin7	BOTTOM SENSE
Pin8	BOTTOM EXCITE

1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302  
1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958  
e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG8_12.3W-00001	C
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	09-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
12.3"W 8-Wire Resistive Touch Screen	1 OF 1		