



| REVISIONS | | | |
|-----------|--------------------------------|----------|------|
| REV | DESCRIPTION | DATE | NAME |
| A | Initial Release. | 05-26-07 | AMH |
| B | Updated temp spec and labeling | 08-17-09 | AMH |


FRONT VIEW

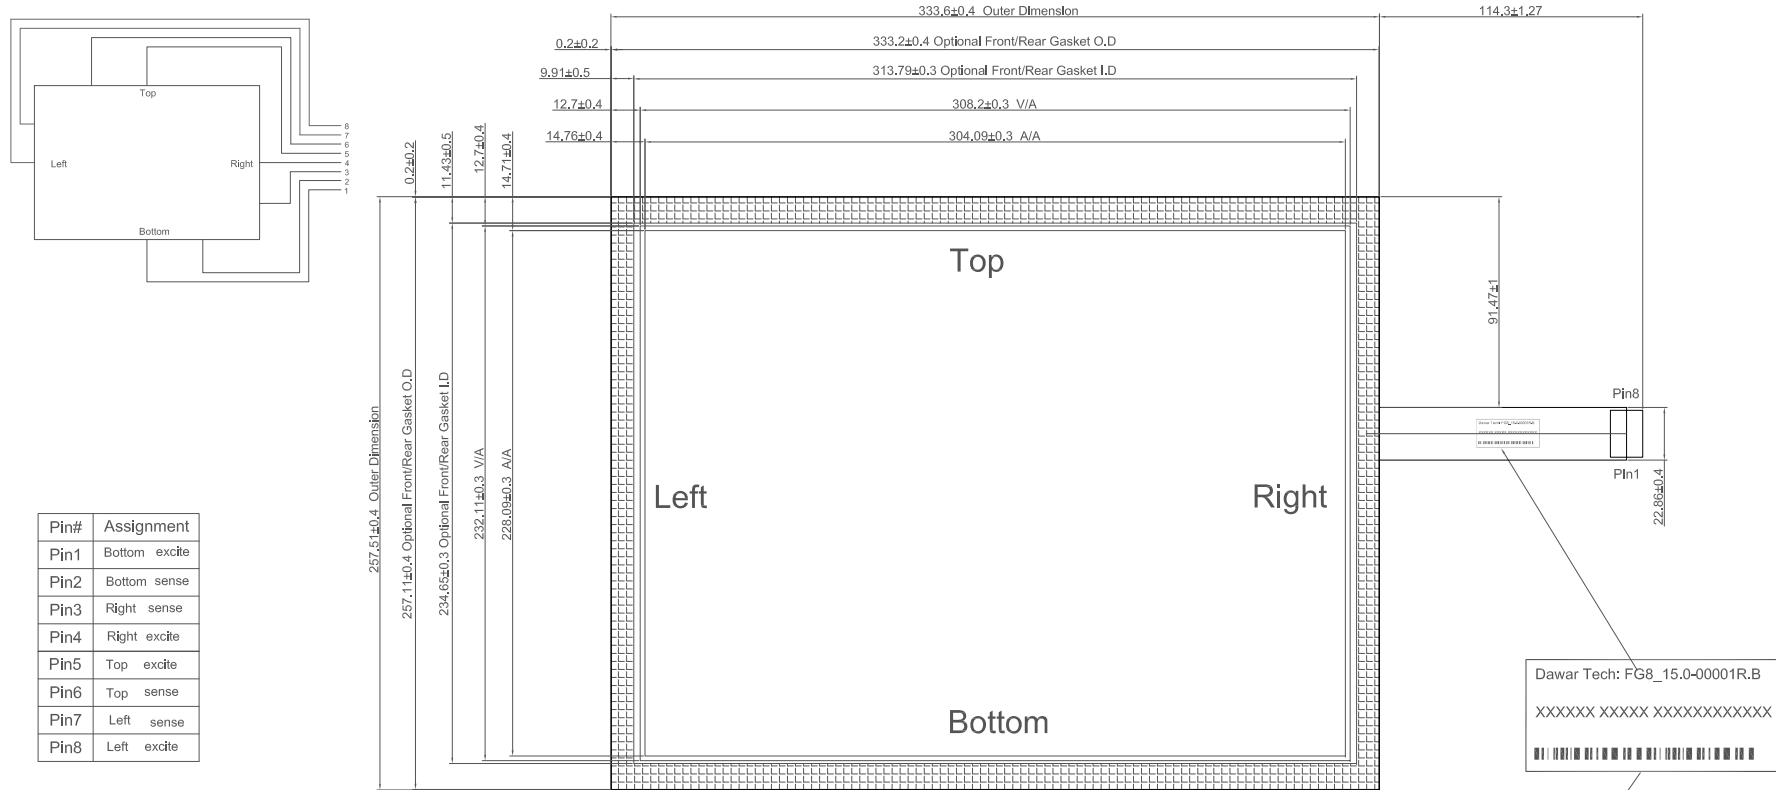

NOTES:

- 1.Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- 2.Life Cycle :>5,000,000 times.
- 3.Linearity: ≤1.5%.
- 4.ITO Film:Anati-Glare Hard Coating & Anti-Newton Ring
Sheet Resistance: 400±50 Ω /square;
ITO Glass: Sheet Resistance: 400±50 Ω /square
- 5.Tail Type :FPC Gold Plated
- 6.All Tolerance Not Marked:±0.3
- 7.All Materials and Components must be RoHS compliant
- 8.No Material is allowed to be larger than the glass size

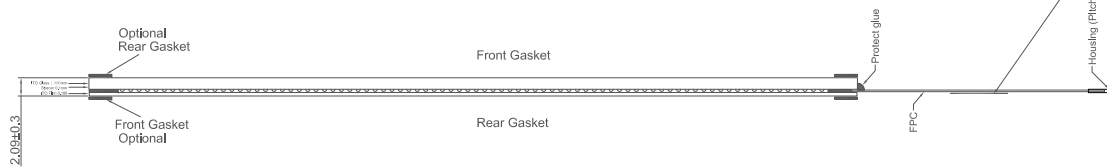

| | | | | |
|--|-------------------------------------|--------|-------------------|----------|
|  <p>1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302 1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958 e-mail: sales@sawar.com - www.dawar.com</p> | CUSTOMER NAME | UNIT | DAWAR P/N | REV |
| | Standard product offering | mm | FG8_15.0-00001 | B |
| | CUSTOMER P/N | REV | DRAWN BY | DATE |
| | | | Jason Liao | 08-17-09 |
| | DESCRIPTION | SHEET | MANUFACTURING NO. | REV |
| | 15.0" 8-Wire Resistive Touch Screen | 1 OF 1 | | |

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.