



REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	07-17-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

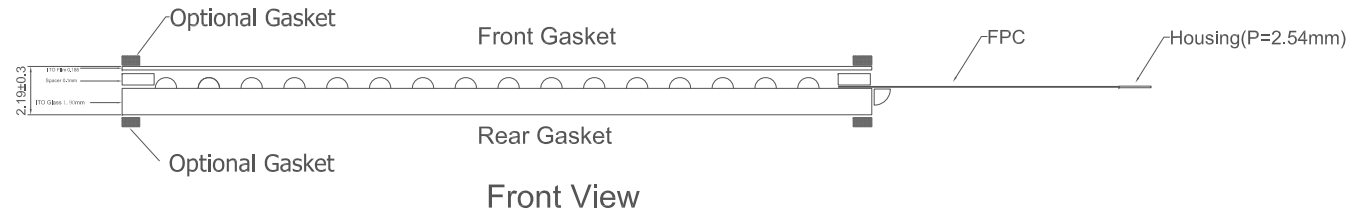

NOTES:

1. Operation Temperature: -20°C ~ +60°C
Storage Temperature: -20°C ~ +70°C
2. Life Time : >5,000,000 times.
3. Linearity: 1.5% AVE, 3% MAX. DEV.
ITO Film: Anti-Glare Hard Coating & Anti-Newton Ring
Sheet Resistance: 400±50 Ω /square;
ITO Glass: Sheet Resistance: 500±50 Ω /square
5. Tail Type : FPC By Gold Plated
6. All Tolerance Without Marked: ±0.3
7. All Materials and Components must be RoHS compliant
8. No Material is allowed to be larger than the glass size

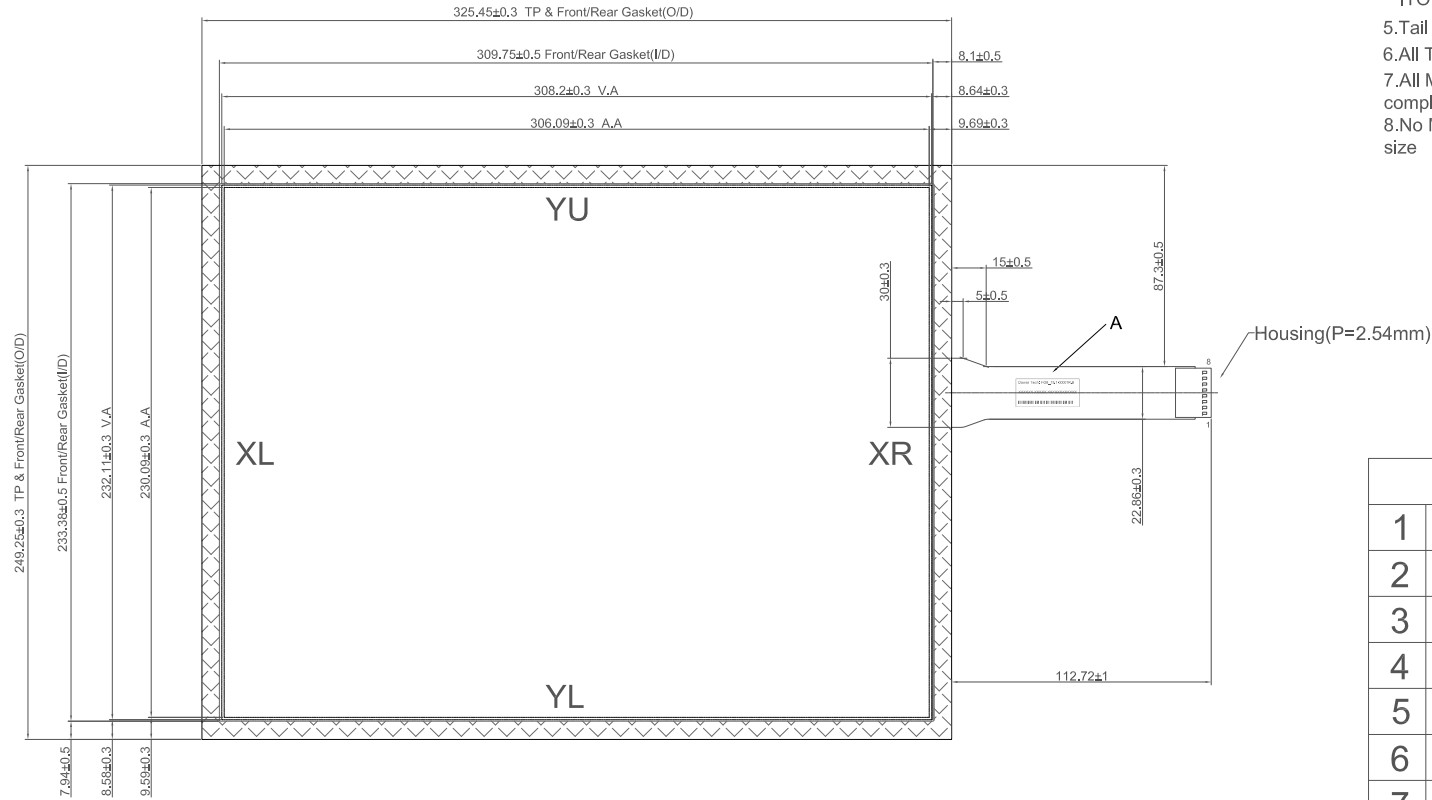

1	YL	BOT.EXCITE
2	YL REF	BOT.SENSE
3	XR REF	RIGHT SENSE
4	XR	RIGHT EXCITE
5	YU	TOP EXCITE
6	YU REF	TOP SENSE
7	XL REF	LEFT SENSE
8	XL	LEFT EXCITE



1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG8_15.1-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
15.1" 8-Wire Resistive Touch Screen	1 OF 1		