
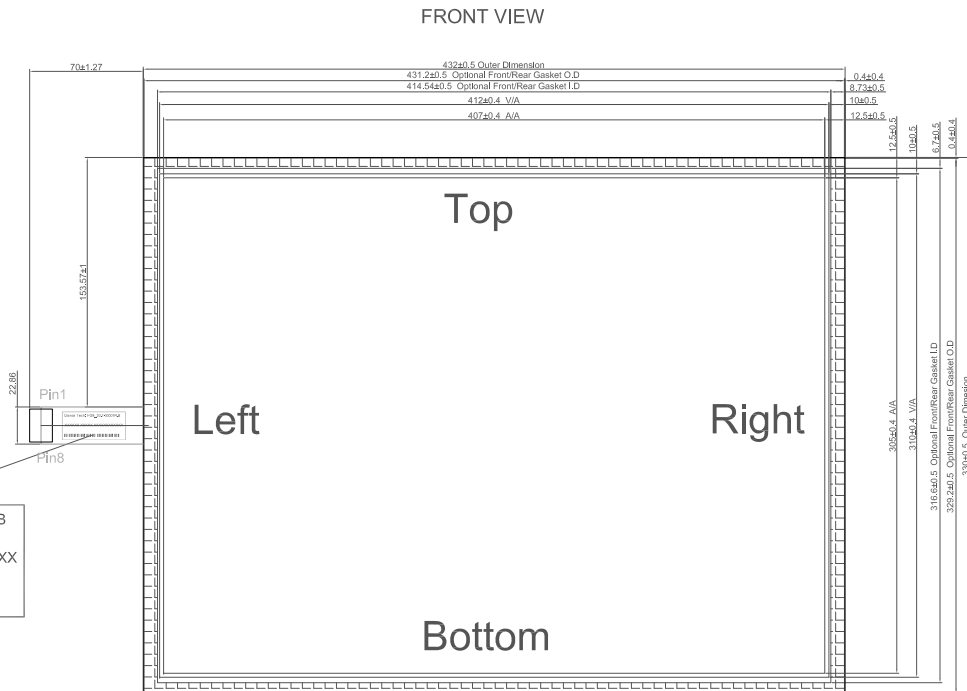


REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	05-26-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

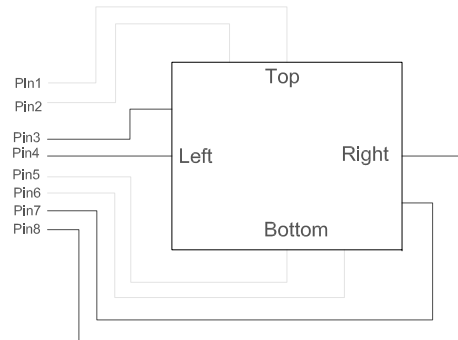


Dawar Tech; FG8_20.1-00001R,B
 XXXXXX XXXXX XXXXXXXXXXXXX


Pin#	Assignment
Pin1	Top excite
Pin2	Top sense
Pin3	Left sense
Pin4	Left excite
Pin5	Bottom excite
Pin6	Bottom sense
Pin7	Right sense
Pin8	Right excite

NOTES:

- 1.Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- 2.Life Time :>5,000,000 times.
- 3.Linearity : ≤ 1.5%.
- 4.ITO Film:Anti-glare Hardening Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
ITO Glass: Sheet Resistanc:400±100 Ω/square
- 5.Tail Type :Gold plated FPC
- 6.All Tolerance Without Marked:±0.3
- 7.All Materials and Components must be RoHS compliant
- 8.No Material is allowed to be larger than the glass size

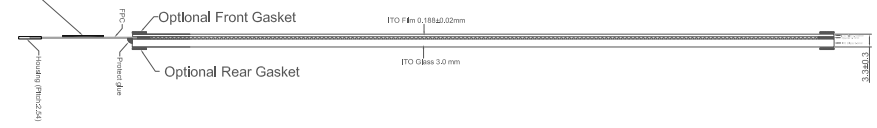

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG8_20.1-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
20.1" 8-Wire Resistive Touch Screen	1 OF 1		