



REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	05-11-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH



Pin Assignment


Pin#	Assignment
Pin1	LEFT EXCITE
Pin2	LEFT SENSE
Pin3	TOP SENSE
Pin4	TOP EXCITE
Pin5	RIGHT EXCITE
Pin6	RIGHT SENSE
Pin7	BOTTOM SENSE
Pin8	BOTTOM EXCITE

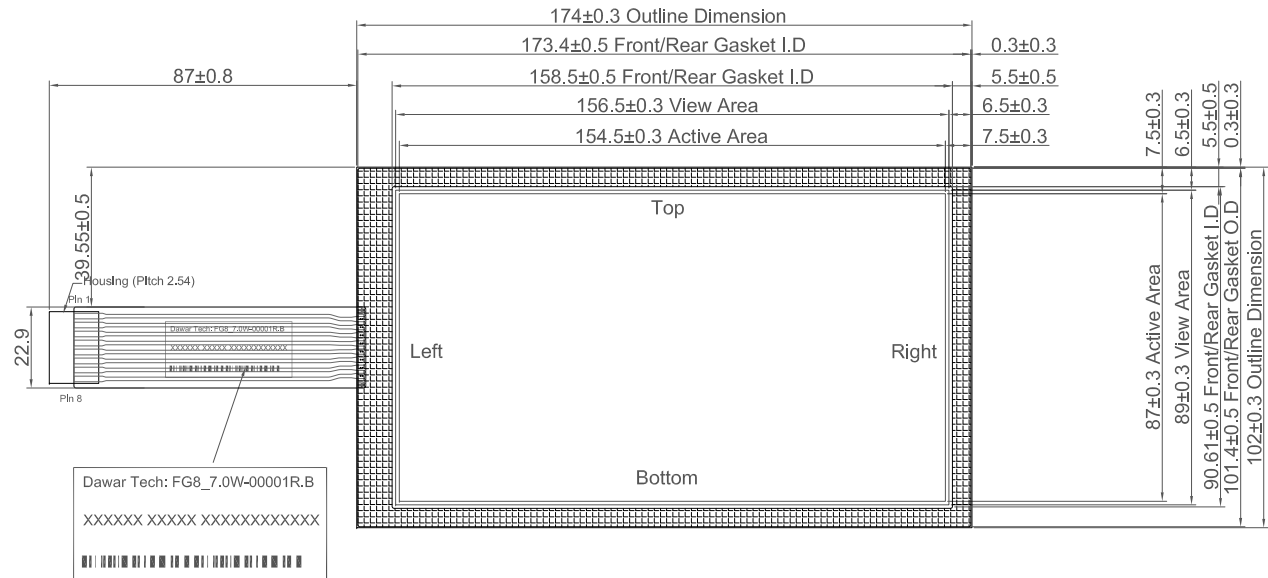


Dawar Tech: FG8\_7.0W-0001R.B  
 XXXXXX XXXXX XXXXXXXXXXXXXXX  


NOTES:

- 1.Operation Temperature:-20°C~+60°C  
Storage Temperature:-20°C~+70°C
- 2.Life Time :>5,000,000 times.
- 3.Linearity : ≤ 1.5%.
- 4.ITO Film:Anti-glare Hardng Coating And Anti-Newton Rlmg  
Sheet Resistance: 400±100 Ω/square;  
ITO Glass: Sheet Reslstanc:400±100 Ω/square
- 5.Tail Type :Gold plated FPC
- 6.All Tolerance Without Marked:±0.3
- 7.All Materials and Components must be RoHS compliant
- 8.No Material is allowed to be larger than the glass size

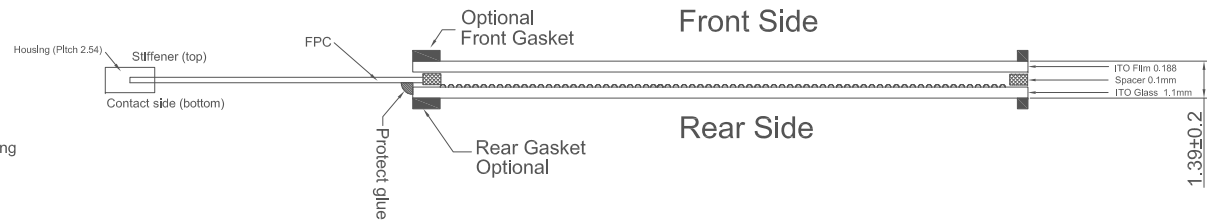

 <p>1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302            1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958            e-mail: sales@sawar.com - www.dawar.com</p>	CUSTOMER NAME	UNIT	DAWAR P/N	REV
	Standard product offering	mm	FG8_7.0W-00001	B
	CUSTOMER P/N	REV	DRAWN BY	DATE
			Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV	
7.0"W 8-Wire Resistive Touch Screen	1 OF 1			

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.