



| REVISIONS | | | |
|-----------|--------------------------------|----------|------|
| REV | DESCRIPTION | DATE | NAME |
| A | Initial Release. | 12-08-07 | AMH |
| B | Updated temp spec and labeling | 08-17-09 | AMH |



Pin Assignment


| Pin# | Assignment |
|------|---------------|
| Pin1 | LEFT EXCITE |
| Pin2 | LEFT SENSE |
| Pin3 | TOP SENSE |
| Pin4 | TOP EXCITE |
| Pin5 | RIGHT EXCITE |
| Pin6 | RIGHT SENSE |
| Pin7 | BOTTOM SENSE |
| Pin8 | BOTTOM EXCITE |

FRONT VIEW

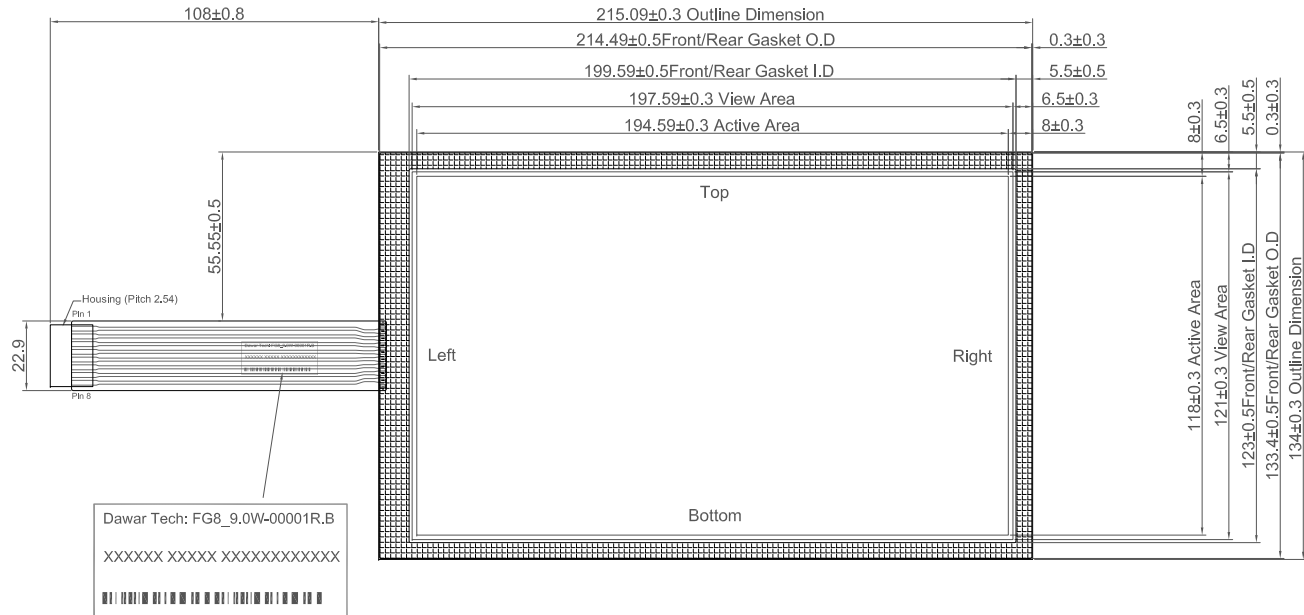

NOTES:

1. Operation Temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Storage Temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
2. Life Time: $>5,000,000$ times.
3. Linearity: $\leq 1.5\%$.
4. ITO Film: Anti-glare Hardening Coating And Anti-Newton Ring
Sheet Resistance: $400 \pm 100 \Omega/\text{square}$;
ITO Glass: Sheet Resistance: $400 \pm 100 \Omega/\text{square}$
5. Tail Type: Gold plated FPC
6. All Tolerance Without Marked: ± 0.3
7. All Materials and Components must be RoHS compliant
8. No Material is allowed to be larger than the glass size

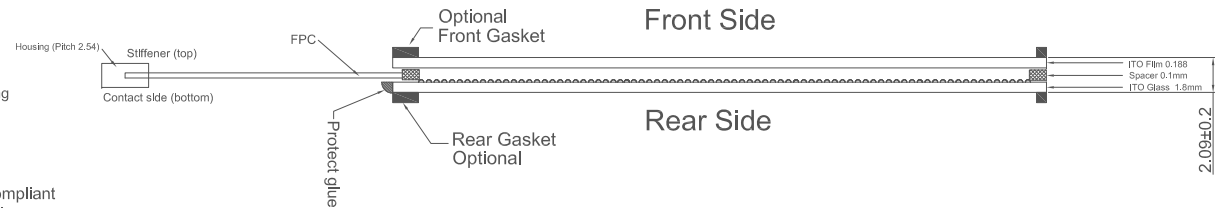

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

| | | | |
|-------------------------------------|--------|-------------------|----------|
| CUSTOMER NAME | UNIT | DAWAR P/N | REV |
| Standard product offering | mm | FG8_9.0W-00001 | B |
| CUSTOMER P/N | REV | DRAWN BY | DATE |
| | | Jason Liao | 08-17-09 |
| DESCRIPTION | SHEET | MANUFACTURING NO. | REV |
| 9.0"W 8-Wire Resistive Touch Screen | 1 OF 1 | | |