


| REVISIONS | | | |
|-----------|--------------------------------|----------|------|
| REV | DESCRIPTION | DATE | NAME |
| A | Initial Release. | 05-07-07 | AMH |
| B | Updated temp spec and labeling | 08-17-09 | AMH |

Front View

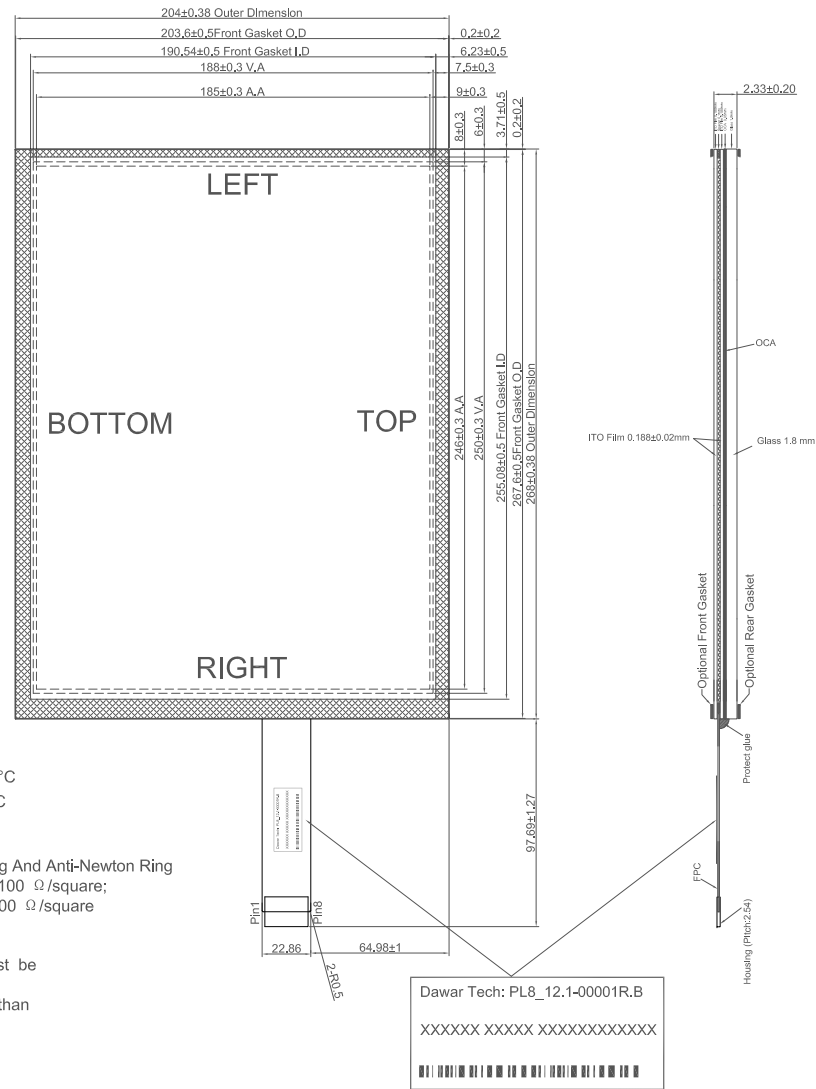

NOTES:

- Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- Life Time : >5,000,000 times.
- Linearity: ≤ 1.5%.
- ITO Film: Anti-glare Hardening Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
- ITO Glass: Sheet Resistance: 400±100 Ω/square
- Tail Type : Gold plated FPC
- All Tolerance Without Marked: ±0.3
- All Materials and Components must be RoHS compliant
- No Material is allowed to be larger than the glass size

| PIN # | Assignment |
|-------|---------------|
| 1 | Left Excite |
| 2 | Left Sense |
| 3 | Bottom Sense |
| 4 | Bottom Excite |
| 5 | Right Excite |
| 6 | Right Sense |
| 7 | Top Sense |
| 8 | Top Excite |



THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

| | | | |
|-------------------------------------|--------|-------------------|----------|
| CUSTOMER NAME | UNIT | DAWAR P/N | REV |
| Standard product offering | mm | PL8_12.1-00001 | B |
| CUSTOMER P/N | REV | DRAWN BY | DATE |
| | | Jason Liao | 08-17-09 |
| DESCRIPTION | SHEET | MANUFACTURING NO. | REV |
| 12.1" 8-Wire Resistive Touch Screen | 1 OF 1 | | |