REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	01-08-08	AMH
B	Updated temp spec and labeling	08-17-09	AMH

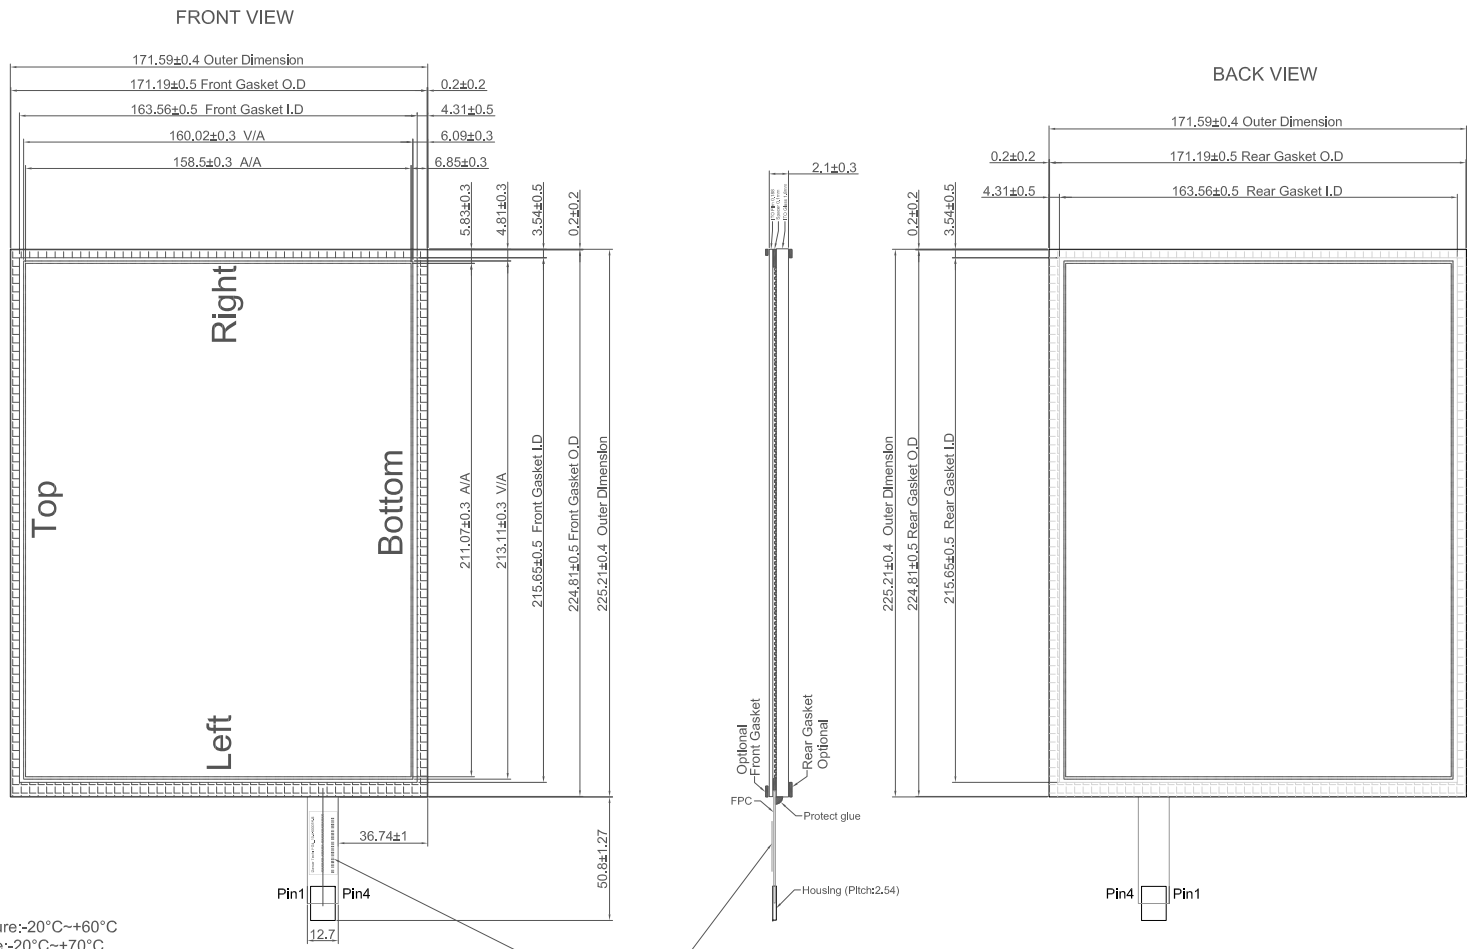

NOTES:

1. Operation Temperature:-20°C~+60°C
   Storage Temperature:-20°C~+70°C
2. Life Time : >1,000,000 times.
3. Linearity : ≤1.5%.
4. ITO Film:Anti-glare Harding Coating And Anti-Newton Ring
   Sheet Resistance: 400±100 Ω/square;
   ITO Glass: Sheet Resistanc:400±100 Ω/square
5. Tail Type :Gold plated FPC
6. All Tolerance Without Marked:±0.3
7. All Materials and Components must be RoHS compliant
8. No Material is allowed to be larger than the glass size

Dawar Tech: FG4_10.4-00001R.B

XXXXXX XXXXX XXXXXXXXXXXX

Pin#	Assignment
Pin1	Top
Pin2	Left
Pin3	Bottom
Pin4	Right

DawarTouch
1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG4_10.4-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
10.4" 4-Wire Resistive Touch Screen	1 OF 1		