


REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	08-20-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

FRONT VIEW

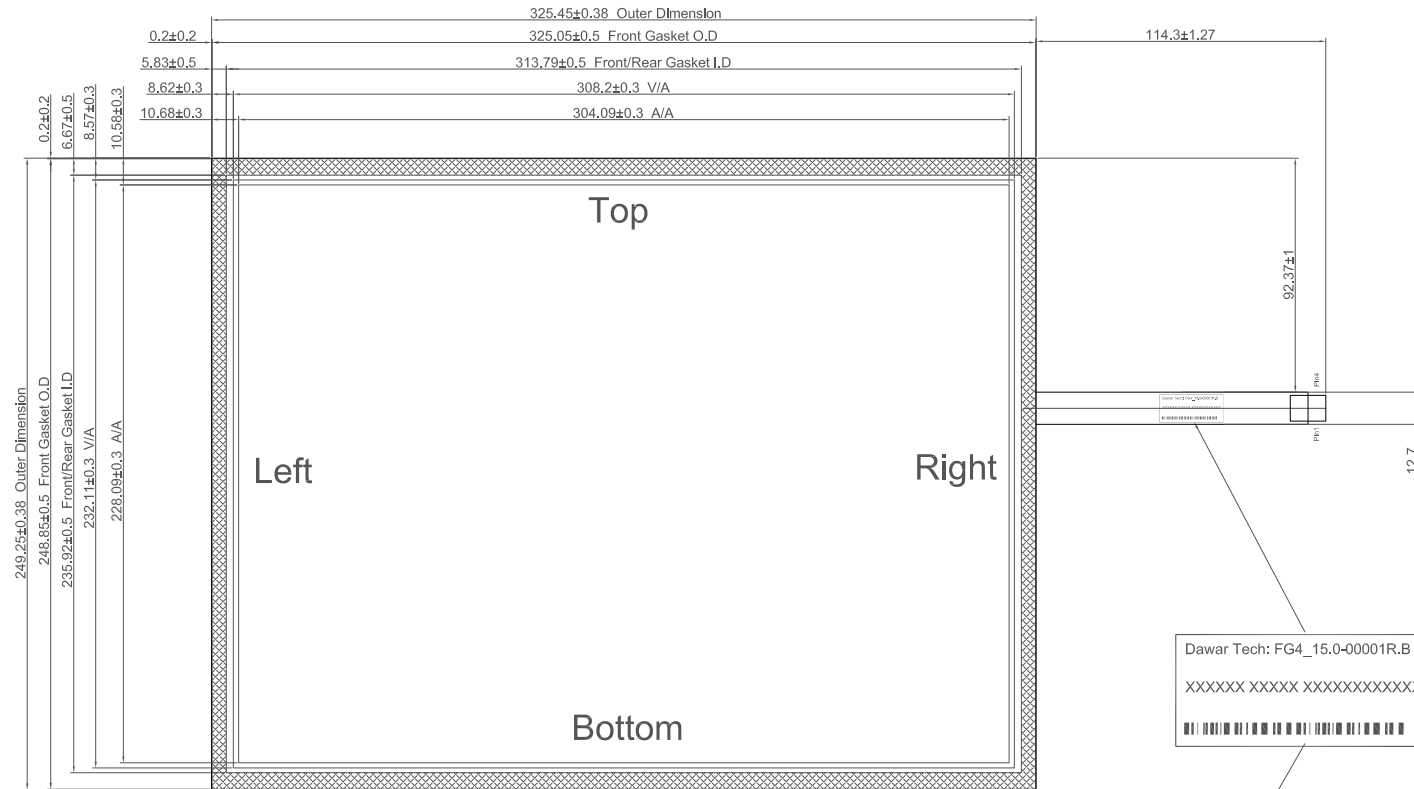

NOTES:

1. Operation Temperature:  $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$   
Storage Temperature:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
2. Life Time:  $> 1,000,000$  times.
3. Linearity:  $\leq 1.5\%$ .
4. ITO Film: Anti-glare Hardening Coating And Anti-Newton Ring  
Sheet Resistance:  $400 \pm 100 \Omega/\text{square}$ ;  
ITO Glass: Sheet Resistance:  $400 \pm 100 \Omega/\text{square}$
5. Tail Type : Gold plated FPC
6. All Tolerance Without Marked:  $\pm 0.3$
7. All Materials and Components must be RoHS compliant
8. No Material is allowed to be larger than the glass size



Pin#	Assignment
Pin1	Bottom
Pin2	Right
Pin3	Top
Pin4	Left



1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302  
1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958  
e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG4_15.0-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
15.0" 4-Wire Resistive Touch Screen	1 OF 1		