



FRONT VIEW

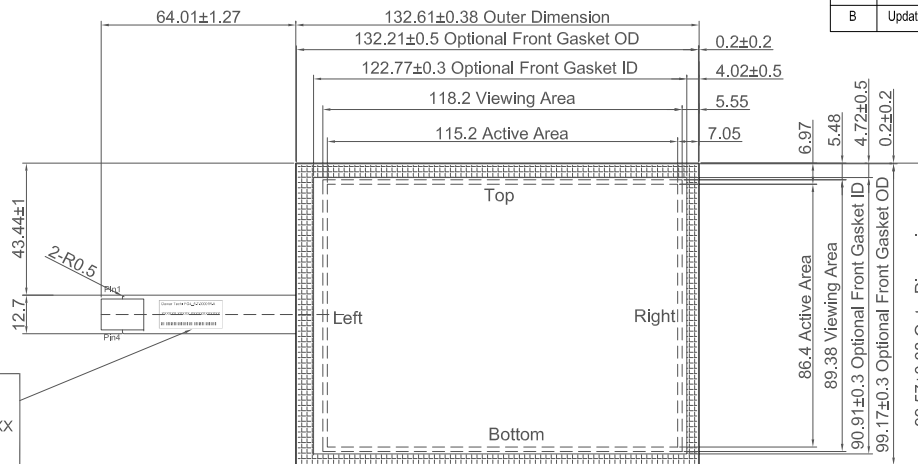


Dawar Tech: FG4_5.7-00001R,B
 XXXXXX XXXXX XXXXXXXXXXXXXXXX


REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	07-17-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

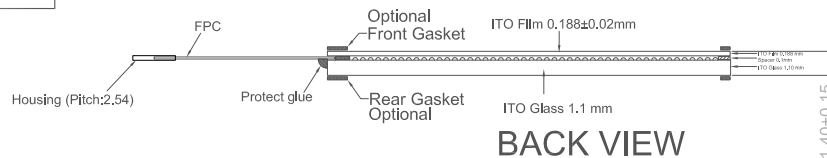

BACK VIEW

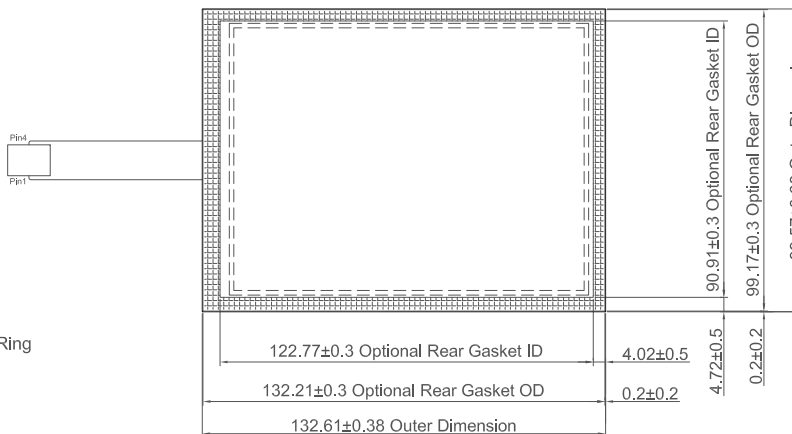

- NOTES:**
- 1.Operation Temperature:-20°C~+60°C.
 - Storage Temperature:-20°C~+70°C
 - 2.Life Time:>1,000,000 times.
 - 3.Linearity:≤1.5%.
 - 4.ITO Film:Anti-glare Hardening Coating And Anti-Newton Ring
 Sheet Resistance: 400±100 Ω/square;
 - ITO Glass: Sheet Resistance:400±100 Ω/square
 - 5.Tail Type :Gold plated FPC
 - 6.All Tolerance Without Marked:±0.3
 - 7.All Materials and Components must be RoHS compliant
 - 8.No Material is allowed to be larger than the glass size

Pin#	Assignment
Pin1	Right
Pin2	Top
Pin3	Left
Pin4	Bottom



1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
 1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
 e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG4_5.7-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
5.7" 4-Wire Resistive Touch Screen	1 OF 1		