



REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	12-08-07	AMH
B	Updated temp spec and labeling	08-17-09	AMH

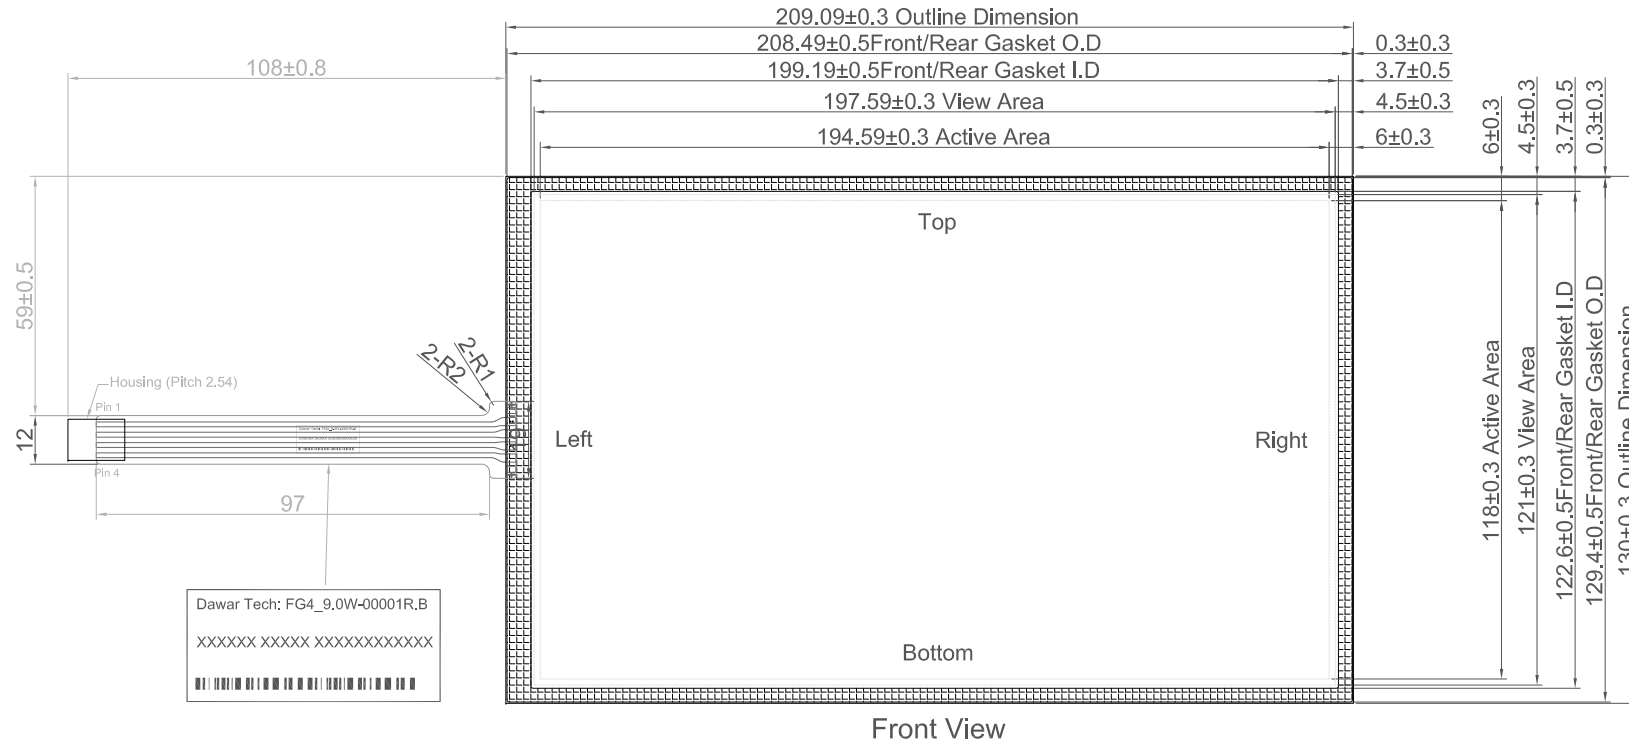

Front View

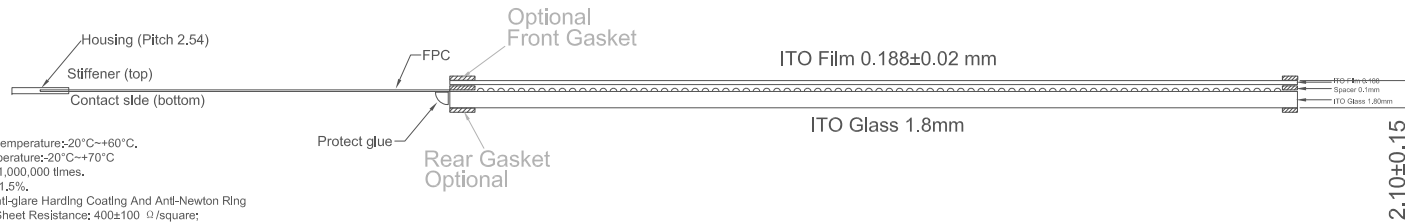

NOTES:

1. Operation Temperature: 20°C ~ +60°C, Storage Temperature: 20°C ~ +70°C
2. Life Time: > 1,000,000 times.
3. Linearity: ≤ 1.5%.
4. ITO Film: Anti-glare Hardening Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square
5. ITO Glass: Sheet Resistance: 400±100 Ω/square
6. Tail Type : Gold plated FPC
7. All Tolerance Without Marked: ±0.3
8. All Materials and Components must be RoHS compliant
9. No Material Is allowed to be larger than the glass size

Pin#	Assignment
1	Left
2	Top
3	Right
4	Bottom



1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
 1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
 e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	FG4_9.0W-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
9.0"W 4-Wire Resistive Touch Screen	1 OF 1		