



| REVISIONS | | | |
|-----------|--------------------------------|----------|------|
| REV | DESCRIPTION | DATE | NAME |
| A | Initial Release. | 01-08-07 | AMH |
| B | Updated temp spec and labeling | 08-17-09 | AMH |

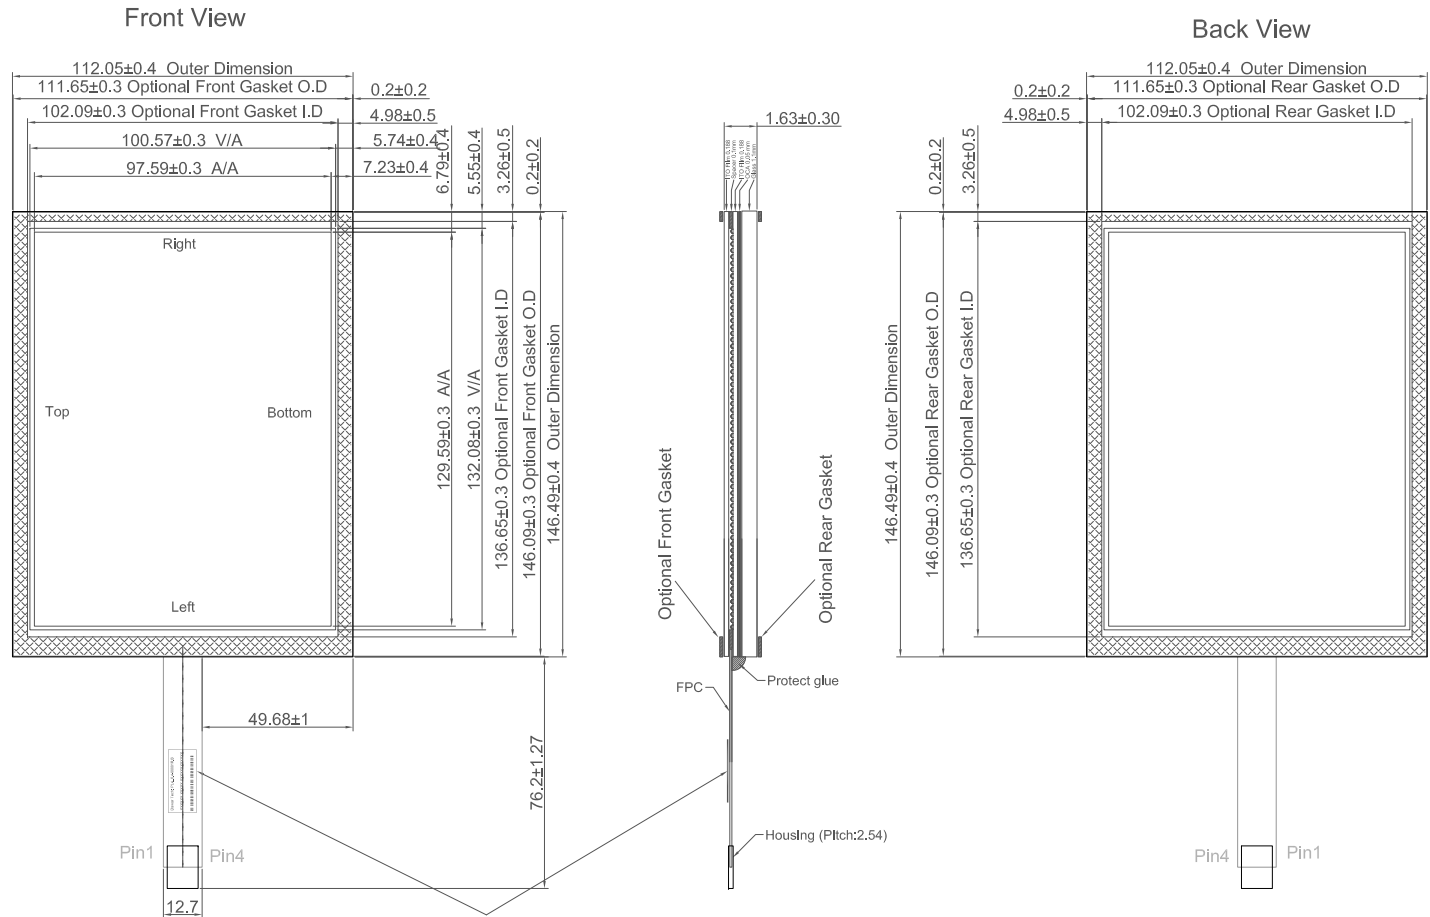

NOTES:

- 1.Operation Temperature:-20°C~+60°C
Storage Temperature:-20°C~+70°C
- 2.Life Time : >1,000,000 times.
- 3.Linearity : ≤ 1.5%.
- 4.I.TO Film:Anti-glare Harding Coating And Anti-Newton Ring
Sheet Resistance: 400±100 Ω/square;
- 5.Tail Type :Gold plated FPC
- 6.All Tolerance Without Marked:±0.3
- 7.All Materials and Components must be RoHS compliant
- 8.No Material is allowed to be larger than the glass size



Dawar Tech: PL4_6.4-00001R,B
 XXXXXX XXXXXX XXXXXXXXXXXXXXX

| Pin# | Assignment |
|------|------------|
| Pin1 | Top |
| Pin2 | Left |
| Pin3 | Bottom |
| Pin4 | Right |

1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
 1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
 e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

| | | | |
|------------------------------------|--------|-------------------|----------|
| CUSTOMER NAME | UNIT | DAWAR P/N | REV |
| Standard product offering | mm | PL4_6.4-00001 | B |
| CUSTOMER P/N | REV | DRAWN BY | DATE |
| | | Jason Liao | 08-17-09 |
| DESCRIPTION | SHEET | MANUFACTURING NO. | REV |
| 6.4" 4-Wire Resistive Touch Screen | 1 OF 1 | | |