


REVISIONS			
REV	DESCRIPTION	DATE	NAME
A	Initial Release.	07-23-09	AMH
B	Updated temp spec and labeling	08-17-09	AMH

FRONT VIEW





T/P	
Pin	Assignment
1	top
2	bottom
3	left
4	right

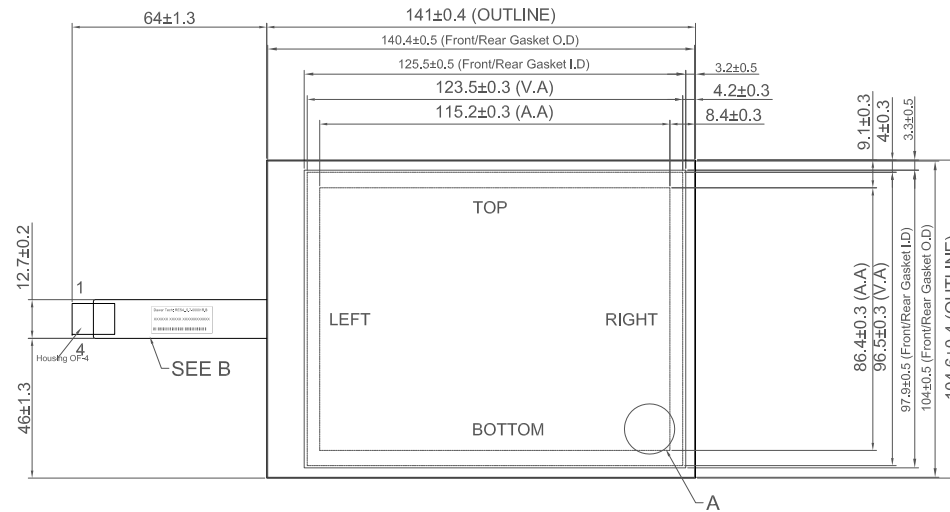

Detail:B

NOTES:

- Operation Temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Storage Temperature: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Life Time: $> 1,000,000$ times.
- Linearity: $\leq 1.5\%$.
- ITO Film: Anti-glare Hardening Coating And Anti-Newton Ring
Sheet Resistance: $400 \pm 100 \Omega/\text{square}$;
ITO Glass: Sheet Resistance: $400 \pm 100 \Omega/\text{square}$
- Tail Type: Gold plated FPC
- All Tolerance Without Marked: ± 0.3
- All Materials and Components must be RoHS compliant
- No Material is allowed to be larger than the glass size

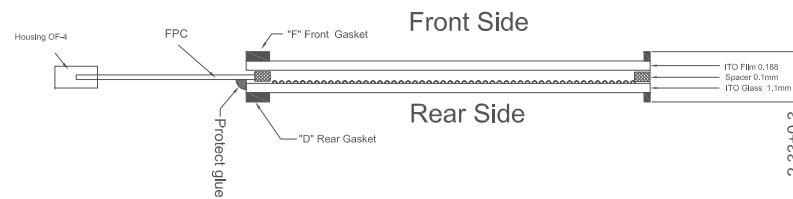

Detail:A
None Scale

1016 North Lincoln Avenue - Pittsburgh, PA 15233-2302
1.800.366.1904 - 412.322.9900 - Fax: 412.322.9958
e-mail: sales@sawar.com - www.dawar.com

THIS DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER NAME	UNIT	DAWAR P/N	REV
Standard product offering	mm	RES4_5.7-00001	B
CUSTOMER P/N	REV	DRAWN BY	DATE
		Jason Liao	08-17-09
DESCRIPTION	SHEET	MANUFACTURING NO.	REV
5.7" 4-Wire Resistive Touch Screen	1 OF 1		