

CT10660 Controller Board Specification

PCAP Microchip® mxT1664T3 USB

**Sustaining Quality,
Exceeding Expectations**

DawarTouch®

1. General Description

The CT10660 is a controller board programmed to work with 7.0in Dawar sensor DW02264. The unprogrammed board is CT10404. The board uses the Microchip® mxT1664T3 maXTouch® controller. The communications interface is standard USB 2.0 full speed.

For more information on the mxT1664T3 controller refer to the following Microchip® documentation:

- ▶ mxT1664T3 Datasheet
- ▶ Interfacing with maXTouch Touchscreen Controllers

Both documents are available on [Microchip's website](#).

2. Functional Description

The CT10660 controller supports the following features:

- ▶ Up to 16 finger touches
- ▶ Stylus touches (stylus diameter depends on sensor design)
- ▶ Glove touches
- ▶ Thick cover lenses (up to 4mm glass, 2mm plastic)
- ▶ Greater than 100Hz report rate
- ▶ Low latency (<10ms for first touch report from idle mode)
- ▶ Automatic self-calibration
- ▶ Aggressive noise avoidance and noise cancellation features
- ▶ Maximum resolution of 4095 x 4095


Additional tuning support from Dawar is available for specialized applications.

3. Electrical Specifications

Parameter	Min	Typ	Max	Units	Remarks
Digital Power Supply (VDD)	-	5	-	V	USB standard
Active Current	-	36	-	mA	Note 1
Sleep Current	-	3.5	-	mA	
X Electrodes	-	-	21	-	
Y Electrodes	-	-	16	-	

Note 1: Active power depends on configuration settings and number of touches.

4. USB Connector

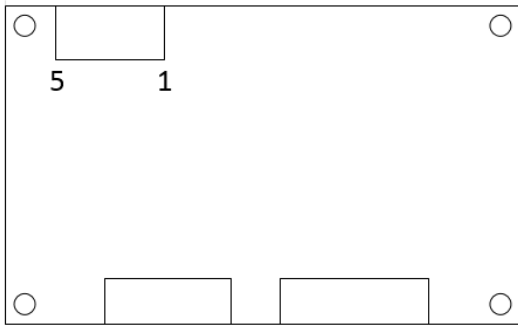

Pin	Description
1	GND
2	5V
3	GND
4	D+
5	D-

USB board connector part number is Most Well 2WF2HD-201505T121A01 (compatible with JST S5B-PH-K-S).

Mating cable connector is Most Well 2HG2CT-201105NPA1A01 with crimp contact 2F2CA-PT1701 (compatible with JST PHR-5 and SPH-002T-P0.5L).

5. Environmental Specifications

Parameter	Min	Typ	Max	Units	Remarks
Operating Temperature	-40	-	85	°C	
Storage Temperature	-40	-	90	°C	
Relative Humidity	0	-	95	%RH	Note 1

Note 1: RH is defined at 60°C, non-condensing.

6. Operating System Support

Operating System	Supported	Remarks
Microsoft Windows XP	Yes	Note 1
Microsoft Windows 7	Yes	Note 2
Microsoft Windows 8	Yes	Note 2
Microsoft Windows 10	Yes	Note 2
Linux	Yes	Note 3

Note 1: Requires custom mouse emulation program. Contact Dawar for support.


Note 2: Compatible with Microsoft HID. No driver required.

Note 3: Kernel version 2.6.38 or later. Refer to <https://github.com/atmel-maxtouch/linux/wiki/USB>.

7. Product Life

Dawar Technologies is committed to providing products stability and support to our valued customers throughout the life of the product. All Dawar Touch products meet the following minimum requirements:

- ▶ 5 year minimum product lifecycle
- ▶ 12 month end of life (EOL) notification
- ▶ Last time buy option with EOL notification
- ▶ 60 day change notification for any change that affects form, fit, or function

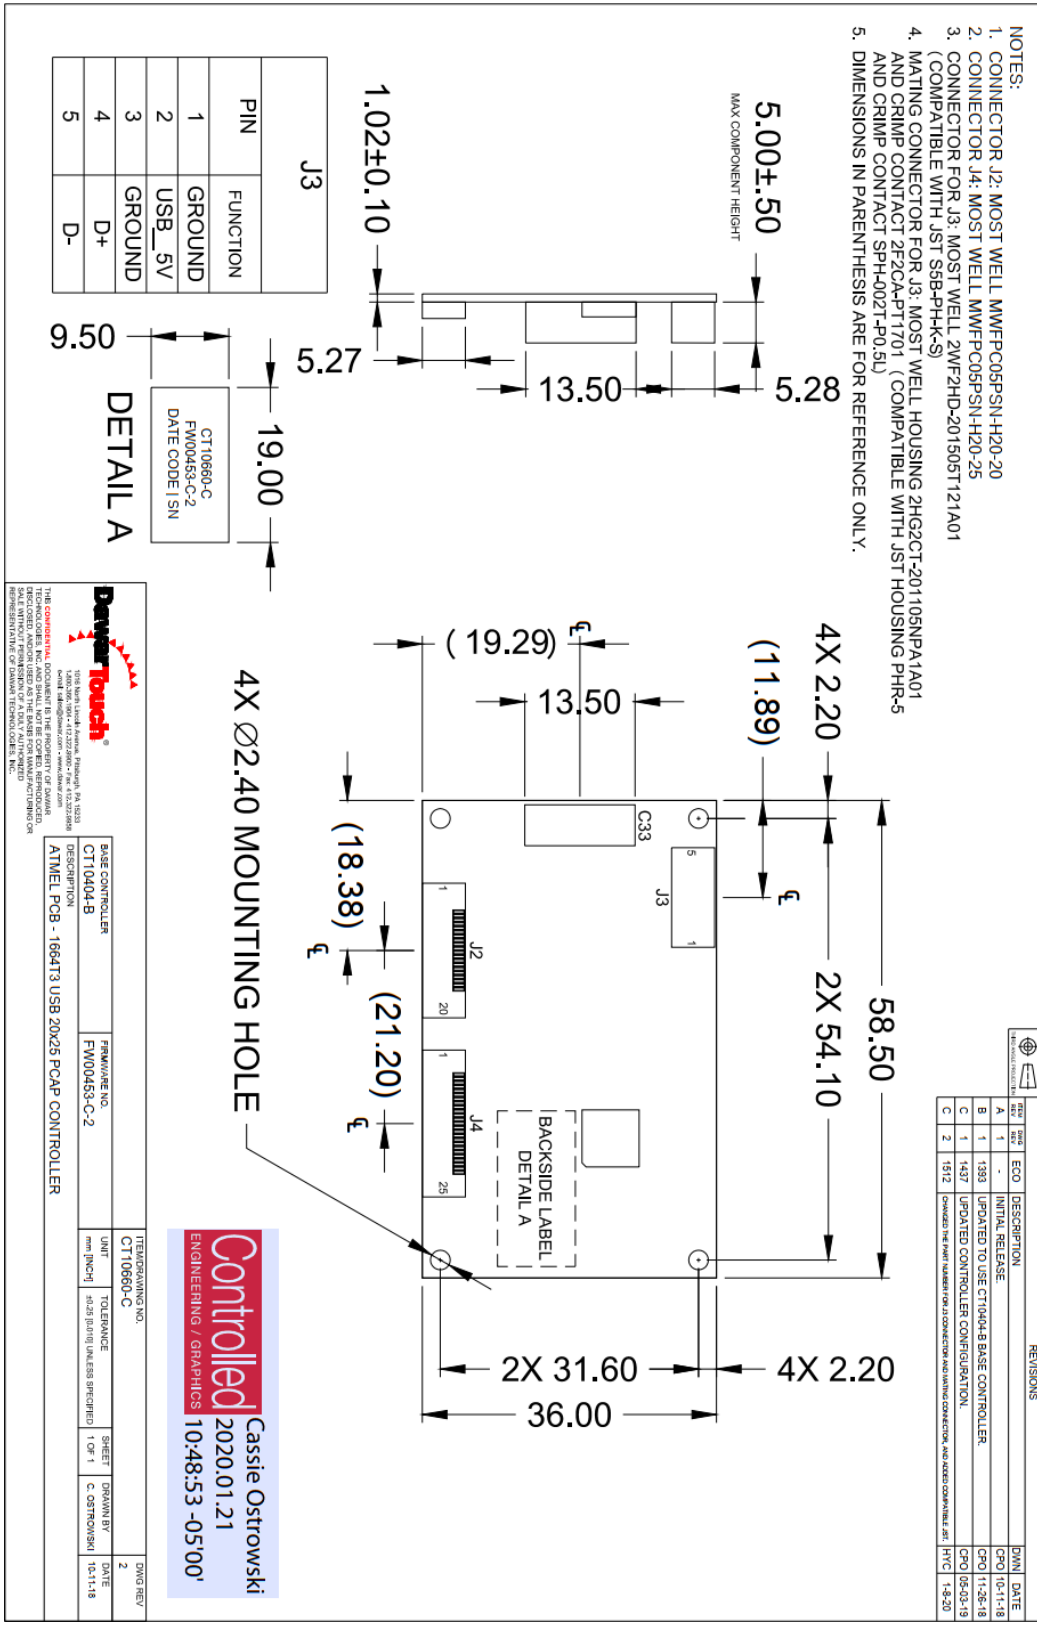

- NOTES:
- CONNECTOR J2: MOST WELL MWFC05PSN-H20-20
 - CONNECTOR J4: MOST WELL MWFC05PSN-H20-25
 - CONNECTOR FOR J3: MOST WELL 2WF2HD-201505T121A01 (COMPATIBLE WITH JST SSB-PH-K-S)
 - MATING CONNECTOR FOR J3: MOST WELL HOUSING 2HGZCT-201105NPA1A01 AND CRIMP CONTACT 2FZCA-PT1701 (COMPATIBLE WITH JST HOUSING PHR-5 AND CRIMP CONTACT SPH-0021-PO 5U)
 - DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.

J3	
PIN	FUNCTION
1	GROUND
2	USB_5V
3	GROUND
4	D+
5	D-

DETAIL A
 CTT10660-C
 FWD00453-C-2
 DATE CODE | SN

REV	DATE	DESCRIPTION	BY	DATE
A	1	INITIAL RELEASE		
B	1	UPDATED TO USE CTT1040-B BASE CONTROLLER		
C	1	UPDATED CONTROLLER CONFIGURATION		
C	2	1512		

Dawar Touch
 1030 North Lehigh Avenue, Allentown, PA 18103
 610-262-9900 • 610-262-9901 • Fax: 610-262-8888
 THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF DAWAR TOUCH. NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF DAWAR TOUCH.

BASE CONTROLLER	CTT1040-B	FIRMWARE NO.	FWD00453-C-2
DESCRIPTION	ATMEL PCB - 1684T13 USB 20X25 PCAP CONTROLLER		

TEMPERATING NO.	CTT10660-C	UNIT	mm (INCH)	TOLERANCE	±0.25 (unless specified)	SHEET	1 OF 1	DRAWN BY	C. OSTROWSKI	DATE	10/11/18
DATE	2	DATE	10/11/18								

Controlled Cassie Ostrowski
 ENGINEERING / GRAPHICS 2020.01.21
 10:48:53 -05'00'

Revision History

Revision	Date	Content	Author
A	9-6-2019	Initial Release	Tony Gray
B	1-27-2020	Added JST part numbers for USB connector	Tony Gray