


REVISIONS				
REV	ECO	DESCRIPTION	DWN	DATE
A	-	Initial release.	AMH	05-18-07
B	-	Updated temp spec and labeling.	JL	08-17-09
C	-	Changed ink design.	JL	08-15-11


FRONT VIEW

Pin#	Assignment
Pin1	Top excite
Pin2	Top sense
Pin3	Left sense
Pin4	Left excite
Pin5	Bottom excite
Pin6	Bottom sense
Pin7	Right sense
Pin8	Right excite

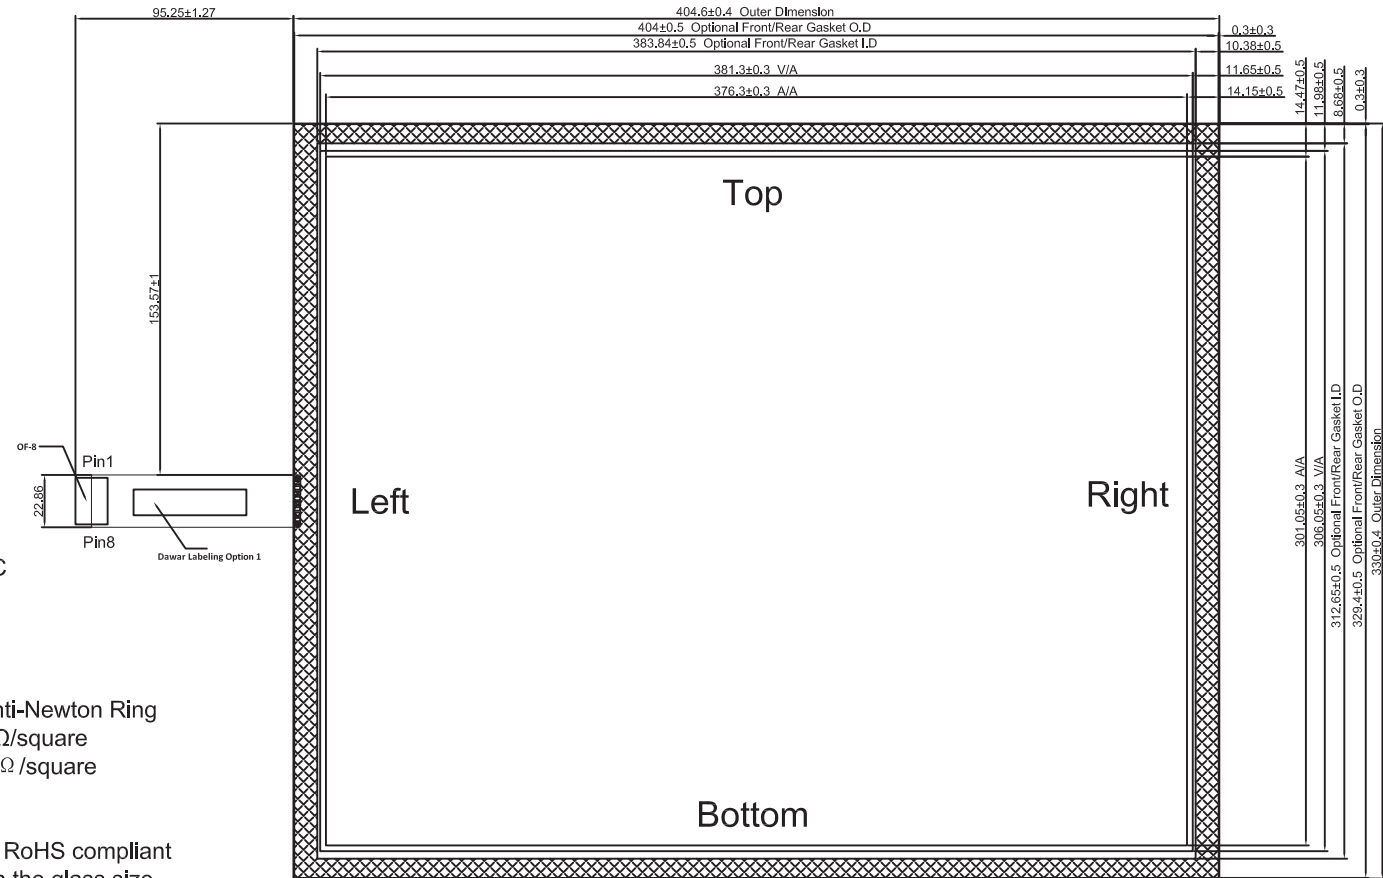

NOTES:

- Operation Temperature: -20°C ~ +60°C
Storage Temperature: -20°C ~ +70°C
- Overlay Colour :Black
- Life Time: >5,000,000 times
- Linearity: $\leq 1.5\%$
- ITO Film: Anti-Glare Hard Coated & Anti-Newton Ring
Sheet Resistance: $400 \pm 100 \Omega/\text{square}$
ITO Glass: Sheet Resistanc: $400 \pm 100 \Omega/\text{square}$
- Tail Type: Gold plated FPC
- Tolerances not marked: ± 0.3
- All materials and components must be RoHS compliant
- No material is allowed to be larger than the glass size except for the tail

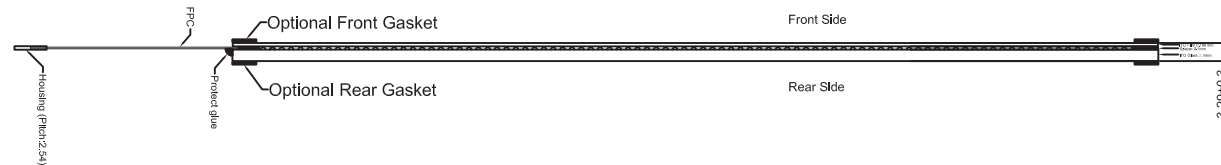

1016 North Lincoln Avenue, Pittsburgh, PA 15233
1.800.366.1904 • 412.322.9900 • Fax: 412.322.9958
e-mail: sales@dawar.com • www.dawar.com
THIS CONFIDENTIAL DOCUMENT IS THE PROPERTY OF DAWAR TECHNOLOGIES, INC. AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED, AND/OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF DAWAR TECHNOLOGIES, INC.

CUSTOMER P/N
Standard product offering
MANUFACTURING NO.

DESCRIPTION
19.0" 8-Wire Resistive Touch Screen

REV	-	DAWAR ENGINEERING P/N FG8_19.0-00001			REV	C
REV	UNIT	TOLERANCE	SHEET	DRAWN BY	DATE	
	mm [inch]	± 0.30 [0.010] unless specified	1 OF 1	Jason Liao	08-17-09	